


Removal and Replacement of Mk7 Super Power Tube

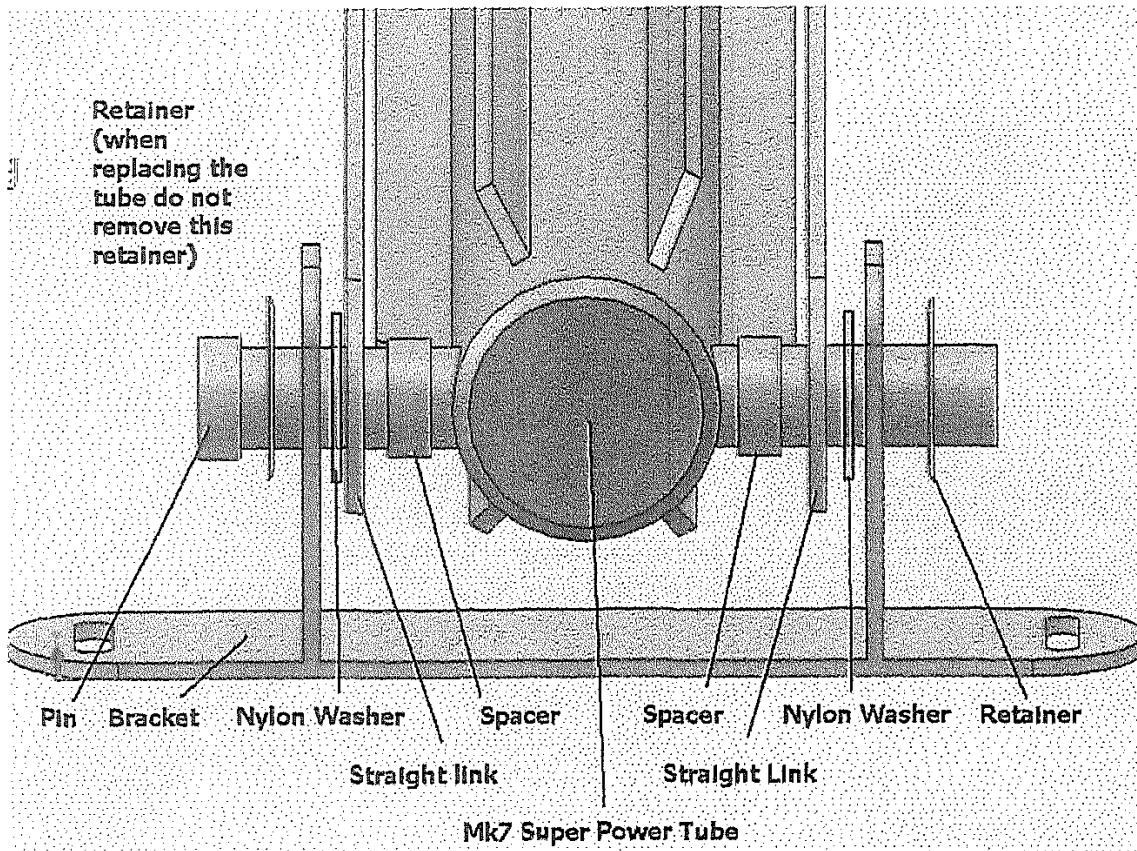

- Place the new tube in a refrigerator for approx. 20 minutes.
- To remove the retainer, use a flat-headed screwdriver to prize the retainer off. Discard the retainer as it will probably be damaged.
- Slide the pin back through the holes in the bracket, straight links and tube taking care not to lose the nylon washers and spacers.
- Remove the new tube from the refrigerator and push the piston back into the tube.
- Refit the tube as shown above, in the diagram, making sure the nylon washers and spacers are in the correct positions.
- Your power tube is now fitted. It will look slightly different to the above diagram in that the parts will be closer together.